

LED FORCE 7™ RGBW




LEDForce 7™ RGBW is a new compact Quadcolour LED based Par Can fixture in a sturdy high-impact aluminum body equipped with 7 x 5 Watt Quad Colour RGBW LEDs. Fitted with an LED control display for easy setting up and with double hanging brackets – for truss mounting and floor standing. Powerful Quad-colour LEDs will amaze you with bright saturated colour a multicolour shadows. Special driving technology ensures flicker free operation while maintaining a long 50.000 hours of LED's life time.




NEW Quad-colour LED technology
7 x 41N1 RGBW LED multichip
Very bright beam
Superior colour mixing
No multi-colour shadows
Compact housing

Compact Quadcolour LED Par Can

- 7 x 5 Watt Quad Colour RGBW LEDs
- Quad-colour LED technology for better colours and no multicolour shadows
- Flicker free operation
- 4 operational modes: Sound Active, Macro, Auto, & DMX
- DMX 512 control protocol
- DMX modes: 2 (4 and 6 channels) for RGBW version
- 5-pin XLR DMX connection
- Sturdy, high-impact aluminum body
- Double hanging brackets – for truss mounting and floor standing
- Standard beam angle: 10° (optional 25° lens kit available)
- Long-life LEDs: 50.000 hours expected life time
- Very low heat output
- Universal Internal PSU: 90-260V, 50/60Hz
- Very low Power consumption: 38W / RGBW
- Dimensions: (LxWxH) 254 x 184 x 146mm / 10" x 7,5" x 5,5" (without hanging bracket)
- Weight: 1,9 Kg
- LED control display

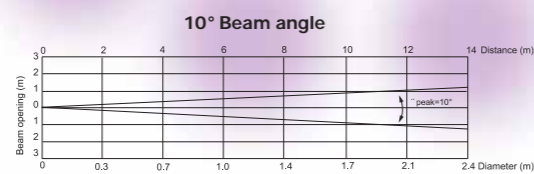

Distance (m)	2	4	5	6	8	10	12	14
Red	27526	898	444	310	171.6	111	60.7	60.5
Green	51348	12812	628	575	321	212	147	111
Blue	2923	4618	404	363	180.1	101	57.0	50.6
White	32545	13112	618	565	321	212	147	111
RGB+W	128318	31628	20019	14013	797	515	355	282

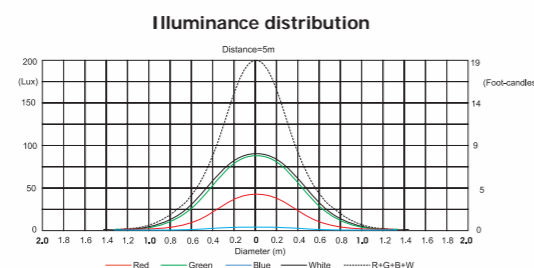

LED FORCE Series



Powered by **ROBE**

www.light4ce.eu

Light4CE

Head office: ROBE lighting s. r. o. | Házovice 2090 | 756 61 Rožnov pod Radhoštěm | Czech Republic | Tel.: +420 571 751 500 | Fax: +420 571 751 515 | E-mail: robe@robe.cz
 Factory: ROBE lighting s. r. o. | Palackého 416 | 757 01 Valašské Meziříčí | Czech Republic | Tel.: +420 571 751 515 | Fax: +420 571 751 515 | E-mail: robe@robe.cz | UK: ROBE UK Ltd. | Northampton, UK | Tel.: 01604 741000 | E-mail: info@robeuk.com | America: ROBE Lighting Inc. | 12349SW 53rd Street, Suite 202 | Cooper City | FL, USA | Tel.: +1 954 680 1901 | E-mail: info@robelighting.com
 South-East Asia: ROBE S.E.A. | Singapore | Tel.: +65 8118 6665 | E-mail: info@robe-sea.com | United Arab Emirates: Makateb Business Centre | Makeen Tower, Corner of 9th and 10th Street Abu Dhabi | UAE | Tel.: +971 2 657 3461 | E-mail: info@robe-me.com | Russia and CIS: Taganskaya str. 26 – 1 – 72 | 109004 Moscow | Russia | Tel.: +7 495 504 9569 | E-mail: info@roberussia.com
 Central and South America: Galicia 1200 ap 303 | 1100 Montevideo | Uruguay | Tel.: +5982 2900 67 47 | E-mail: info@robeca.com

Powered by **ROBE**


LED FORCE PAR 18™ RGBW




- NEW Quad-colour LED technology
- 18 x 4IN1 RGBW LED multichip
- Superiour colour mixing
- No multi-colour shadows
- Extremely bright beam
- 25° beam angle
- Die cast aluminium housing

- Quadcolour LED Par Can**
- 18 x 5 Watt Quad Colour RGBW LEDs
 - Quad-colour LED technology for better colours and no multicolour shadows
 - Flicker free operation
 - 4 operational modes: Sound Active, Macro, Auto, & DMX
 - DMX 512 control protocol
 - DMX modes: 2 (4 and 6 channels) for RGBW version
 - 3-pin and 5-pin XLR DMX connection
 - Aluminum body
 - Double hanging brackets – for truss mounting and floor standing
 - Standard beam angle: 25°
 - Optional 10° lens kit available
 - Gel frame included
 - Long-life LEDs: 50.000 hours expected life time
 - Very low heat output
 - Universal Internal PSU: 100–240V, 50/60Hz
 - Very low Power consumption: 95W
 - Dimensions: (LxWxH) 292 x 216 x 216mm / 11,5" x 8,5" x 8,5" (without hanging bracket)
 - Weight: 4 Kg
 - LED control display

LEDForce 18™ RGBW Par Cans with 18 x 4IN1 RGBW LED will blind you with powerful light output of multichip Quad-colour LED technology. No multicolour shadows and extremely bright beam of 25° beam angle - this is the result of superior colour mixing lens system. Low weight aluminum housing with double hanging brackets – for truss mounting and floor standing allows mounting in any position. Gel frame included as standard and optional 10° lens kit available upon demand.

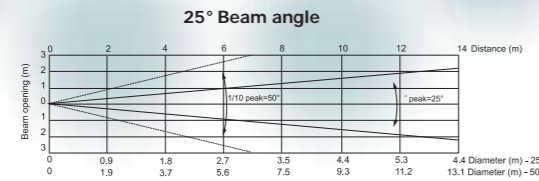

Distance (m)	2	4	5	6	8	10	12	14
Red	42548	10610	686	474	273	172	121	85.8
Green	71385	17837	11411	787	454	292.5	201.5	147.4
Blue	11018	2784	202	135.5	81	50.8	35.4	25.7
White	130384	32523	21115	13215	828	494	343	242
R-G-B-W	1367145	40748	31830	22101	13432	807	505	414

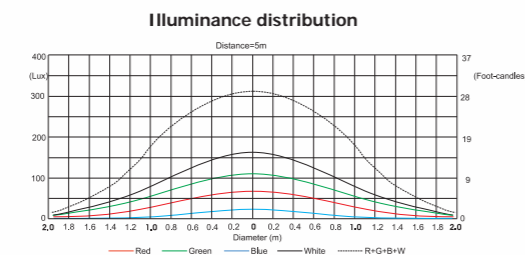


LED FORCE 18™ RGBW




- NEW Quad-colour LED technology
- 18 x 4IN1 RGBW LED multichip
- Superiour colour mixing
- No multi-colour shadows
- Extremely bright beam
- 25° beam angle
- Die cast aluminium housing

- Quadcolour LED Par Can**
- 18 x 5 Watt Quad Colour RGBW LEDs
 - Quad-colour LED technology for better colours and no multicolour shadows
 - Flicker free operation
 - 4 operational modes: Sound Active, Macro, Auto, & DMX
 - DMX 512 control protocol
 - DMX modes: 2 (4 and 6 channels) for RGBW version
 - 5-pin XLR DMX connection
 - Die cast aluminum body
 - Double hanging brackets – for truss mounting and floor standing
 - Standard beam angle: 25°
 - Optional 10° lens kit available
 - Gel frame included
 - Long-life LEDs: 50.000 hours expected life time
 - Very low heat output
 - Universal Internal PSU: 100–240V, 50/60Hz
 - Very low Power consumption: 95W
 - Dimensions: (LxWxH) 278 x 220 x 358mm / 9,7" x 8,7" x 14" (without hanging bracket)
 - Weight: 4,7 Kg
 - LED control display

LEDForce 18™ RGBW Par Cans will blind you with powerful light output of 18 x 4IN1 RGBW LED multichip Quad-colour LED technology. Superior colour mixing with no multicolour shadows and extremely bright beam of 25° beam angle will please any lighting professional. Die cast aluminum housing with double hanging brackets – for truss mounting and floor standing allows mounting in any position. Gel frame included as standard and optional 10° lens kit available upon demand.

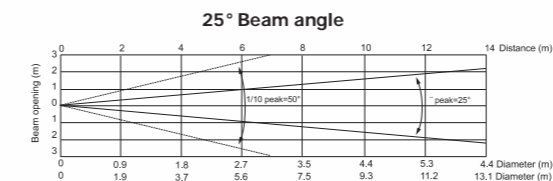

Distance (m)	2	4	5	6	8	10	12	14
Red	27526	686	444	313	172	111	80.7	60.6
Green	36427	909	606	414	252	161.5	111	80.7
Blue	11018	2784	202	135	81	50.8	35.4	25.7
White	51248	12812	828	575	323	212	147.3	111
R-G-B-W	128918	31736	20318	14113	787	515	353	262

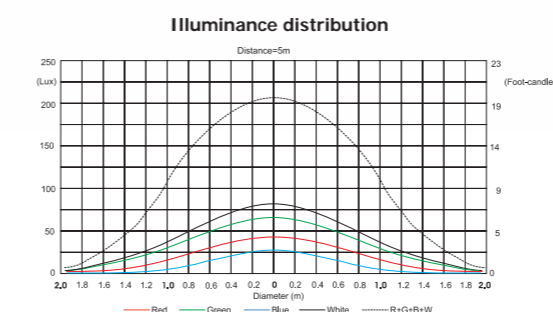


LED FORCE 18 eXterior™ RGBW



- NEW Quad-colour LED technology
- 18 x 4IN1 RGBW LED multichip
- IP 65 Outdoor rated
- Superior colour mixing
- No multi-colour shadows
- Extremely bright beam
- 25° beam angle
- Die cast aluminium housing

- Quadcolour LED Par Can for outdoor use**
- 18 x 5 Watt Quad Colour RGBW LEDs
 - Quad-colour LED technology for better colours and no multicolour shadows
 - IP65 Die cast aluminum body
 - Flicker free operation
 - 4 operational modes: Sound Active, Macro, Auto, & DMX
 - DMX 512 control protocol
 - DMX modes: 2 (4 and 6 channels) for RGBW version
 - 5-pin XLR connector on 0,5m IP DMX cable
 - Double hanging brackets – for truss mounting and floor standing
 - Standard beam angle: 25°
 - Optional 10° lens kit available
 - Long-life LEDs: 50.000 hours expected life time
 - Very low heat output
 - Universal Internal PSU: 90-260V, 50/60Hz
 - Very low Power consumption: 95W
 - Dimensions: (LxWxH) 292 x 216 x 216mm / 11,5" x 8,5" x 8,5" (without hanging bracket)
 - Weight: 6,5 Kg
 - LED control display for set up and control
 - Display auto shut off

LEDForce 18 eXterior™ RGBW is a perfect fit for any outdoor installations where both powerful output and IP 65 rating is required. An extremely bright 25° beam with no multicolour shadows is provided by new Quad-colour LED technology 18 x 4IN1 RGBW LED multichip with optional 10° lens kit available. Die cast aluminum casing with double hanging brackets for mounting in any positions, LED set up and control display with auto shut function and Universal Internal Power supply are only few admirable features of this Par Can which is a good companion to any lighting designer.

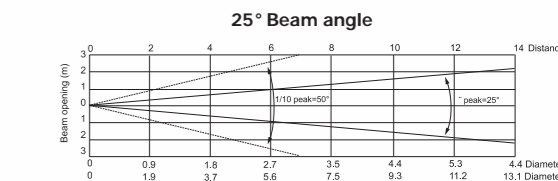

Distance (m)	2	4	5	6	8	10	12	14
Red	27526	686	444	313	172	111	80.7	60.6
Green	36427	909	606	414	252	161.5	111	80.7
Blue	11018	2784	202	135	81	50.8	35.4	25.7
White	51248	12812	828	575	323	212	147.3	111
R-G-B-W	128918	31736	20318	14113	787	515	353	262

